

Finger Edge Contour Perimeter as a Biometric Based Identification System

by Kusworo Adi

Submission date: 20-Jan-2020 01:51PM (UTC+0700)

Submission ID: 1243962587

File name: Contour_Perimeter_as_a_Biometric_Based_Identification_System.pdf (430.69K)

Word count: 3340

Character count: 15513

PAPER • OPEN ACCESS

Finger Edge Contour Perimeter as a Biometric Based Identification System

To cite this article: C E Widodo and K Adi 2019 *J. Phys.: Conf. Ser.* **1217** 012033

View the [article online](#) for updates and enhancements.



IOP | ebooks™

Bringing you innovative digital publishing with leading voices to create your essential collection of books in STEM research.

Start exploring the collection - download the first chapter of every title for free.

Finger Edge Contour Perimeter as a Biometric Based Identification System

C E Widodo¹ and K Adi²

Department of Physics, Faculty of Science and Mathematics, Diponegoro University,
Semarang, Indonesia

E-mail: catur.ediwidodo@gmail.com, kusworoadi@gmail.com

Abstract. Generally, personal identification system is still done by conventional techniques, such as using ID cards, passwords or PIN numbers. These systems is easily lost, damaged or forgotten. In this paper we present a new method for identifying a person with a biometric based on palm of the hand. This system does not require a peg like an identification system based on existing hand geometry. Phase of development are: first, the palm image scanned in the RGB format is converted into a gray level. Then the image is converted to binary by giving the correct threshold value. From the binary image, we carry out the edge detection process to get the contour perimeter of the palm. From the contour perimeter of the palm, we measure the length of 8 edges contour perimeter of the fingers i.e. the right edge of the thumb, the left edge of the index finger, the right edge of the index finger, the left edge of middle finger, the right edge of middle finger, the left edge of pinkie, the right edge of pinkie, and the left edge of ring finger. The identification process is performed by minimum distance, which is the smallest euclidean distance value associated with the test image and database. The experimental results giving good performance with a success of up to 90%.

1. Introduction

Some biometric techniques can be used as authentication systems [1,2], including fingerprint scanning, face verification, identification of retinal scans, and recognition based on hand geometry [3,4,5,6]. Although fingerprints are the most popular system, actually other biometric studies are very interesting, because we can explore different types of data. Each biometric system has its advantages and disadvantages, including data acquisition stage, preprocessing stage, and classification stage [7]. In this paper we propose a new technique that is an identification system using finger side contours. Feature features that are used are different from the geometry hand that was researched by previous researchers [7,8,9,10,11,12]. The advantage of this technique is that it does not require a peg, so its use is convenient and easy. The identification system using the side finger contour proposed here has the same typical as other biometric systems [7]. He works in two phases: enrollment phase and comparison phase. In the enrollment phase, the palm photos of the users are taken. The photo is then preprocessing, then feature extraction is performed to produce a feature vector from the user. Vector features of the user are then stored in the database. In the verification phase, photos of a user's palm are taken, then preprocessing, then feature extraction is performed to produce a feature vector from the user. The feature vector is then compared to the database to find out who the palm is.

In this work, an explanation of all stages of system development will be given. Section 2 will describe feature and classification extraction stages including image capture, preprocessing, contouring and measurement of finger side contour lengths, and classification based on the minimum distance from Euclid distance. In section 3, we present the results of the experiment. The conclusion of the observed results and the direction of future research will be presented in chapter 4.

2. Features extractions and classification

The purpose of data extraction is the sample data in the form of hand photographs, the process, and produce feature vectors that present specific characteristics to a user among all members of the population. The purpose of classification is to enter user vectors into the comparative process to map users who you have found. In this section we will explain the method of doing palm photos, preprocessing, feature extraction, and classification.

2.1. Image Capturing

The signal from the sample is displayed with a color CCD camera with a resolution of 480 x 640 pixels, functioning on the platform designed to display the distance on the camera. The camera and platform are attached to a closed system to be stable and not related to outside. In this study, the distance of light with a sample is 30 centimeters and the light source is an LED lamp with a power of 3 watts. When the process of taking pictures, the position of the fingers must be tenuous. The prototype design and palm works can be used in Figure 1.

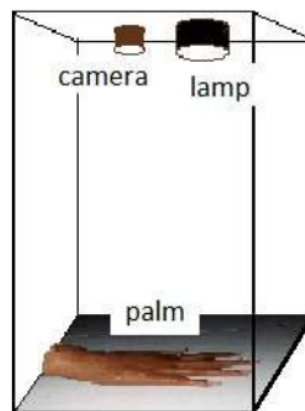


Figure 1: Prototype scheme

2.2. Preprocessing.

After the image is taken, preprocessing is done. Preprocessing is carried out in three phases, namely RGB to Gray scale transformation, segmentation, and contouring. The first step is to transform colored images into grayscale. To do this, the average operation is carried out on red, green and blue channels [13]. After being converted into grayscale image, then segmentation is done using treshold operation to separate objects with background. This threshold value is obtained by trial and error. From the results of the experiment or trial and error obtained that the appropriate threshold value for segmenting is 150. The part with an intensity value of less than 150 will be changed to number 0, and the intensity value above 150 will be changed to number 1, so that the binary image is separated between the palm segment and the background. Because in this study the input image used in the object's intensity value is less than 150, then it is converted to a number 0 or black. Whereas in the background which has an intensity above 150, it is changed to number 1 or white. After going through the segmentation process using treshold, the resulting image of the segmentation process is not perfect. The results of segmentation in the palm area is still have a small white hole, usually in the nail area. To overcome this problem, morphological operations are used to removing small island.

The next step is edge detection. This edge detection serves to identify the palm contour. The detection used is a second derivative operator (Laplacian of Gaussian) that can detect edges accurately especially on steep edges because it has zero crossing. The Laplacian of Gaussian is formed from a Gaussian process which functions to reduce noise and is followed by a Laplace operation which serves to minimize the possibility of edge databases. The Lapacian of Gussian operator works by finding the zero value in the second derivative of the image, because when the first derivative is at the maximum value, the second derivative will produce a zero value. The second derivative from the direction x and y is combined into one operator value. Figure 2 shown an example of the process of forming palm contour.

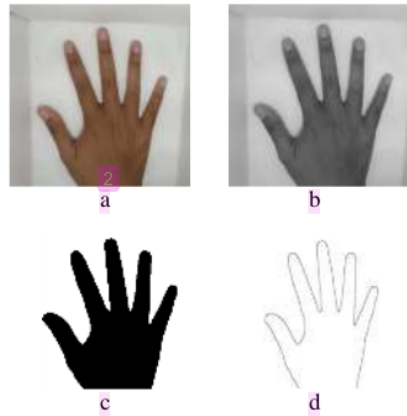


Figure 2: Example of the process of palm hand contour formation: (a) RGB image, (b) gray scale image, (c) binary segmentation image, and (d) contour image. For visualization clarity, image (b) is displayed in invert mode.

2.3. Feature Extraction

After we get the image contour of palm, we perform the length of 8 edges perimeter of the fingers i.e. the right edge of the index finger, the left edge of the finger, the right edge of the finger, the left edge of pinkie, the right edge of pinkie, and the left edge of ring finger. The eight segments are measured in the order shown in Figure 3a, where the initial measurement is at the middle finger. This is done to facilitate tracking. Tracking is done based on the chain code as shown in Figure 3b.

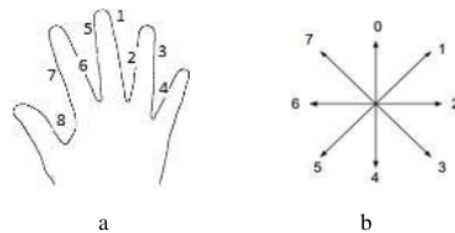


Figure 3: Eight segment (a) and chain code (b)

To measure segment length 1, tracking starts from the middle finger, moves right, down or left with a clockwise decision making sequence (with a chain code 1, 2, 3, 4 or 5) and will stop if the contour leads to above (chain code 6, 7 or 8). To measure the length of segment 2, tracking starts from the position of the final pixel in tracking segment 1, moves right, up or left (chain code 1, 8, 7, 6 or 5), and stops when the contour points down (chain code 4, 3 or 2). To measure the length of segment 3, a method such as the measurement of segment length 1 starts from the final pixel position of tracking segment 2. To measure the length of segment 4, a method such as segment 2 measurement starts from the final pixel position of tracking segment 3. To measure the length of segment 5, tracking starts from middle finger, move left, down or right (chain code 5, 4, 3, 2, or 1) and will stop if the contour points up (code 8, 7 or 6). To measure the length of segment 6, tracking starts from the final pixel position on tracking 5, moves left, down or right (with a chain code of 5, 6, 7, 8 or 1) and stops if the contour is directed down (chain code 2, 3 or 4). To measure the length of segment 7, a method such as measurement of segment 5 starts from the final pixel position of tracking segment 6. To measure the length of segment 8, a method like segment 6 starts from the final pixel position of segment tracking 7. To be clearer, you can see the following algorithm:

```

For i = 1 to 480
  For j = 1 to 640
    If im(i,j) == 1
      startX = i
      startY = j

segment1 = 0
posX = startX
posy = startY
while posX < 480
  if nextPos in [1, 2, 3, 4, 5]
    segmen1 = segmen1+1
    posX = newPosX
    posY = newPosY
  if nextPos in [6, 7, 8]
    break
segment2 = 0
while posX < 480
  if nextPos in [1, 8, 7, 6, 5]
    segmen1 = segmen1+1
    posX = newPosX
    posY = newPosY
  if nextPos in [4, 3, 2]
    break
segment3 = 0
while posX < 480
  if nextPos in [1, 2, 3, 4, 5]
    segmen1 = segmen1+1
    posX = newPosX
    posY = newPosY
  if nextPos in [6, 7, 8]
    break
segment4 = 0
while posX < 480
  if nextPos in [1, 8, 7, 6, 5]
    segmen1 = segmen1+1

```

```

        posX = newPosX
        posY = newPosY
    if nextPos in [4, 3, 2]
        break
segment5 = 0
posX = startX
posy = startY
while posX < 480
    if nextPos in [5, 4, 3, 2, 1]
        segmen1 = segmen1+1
        posX = newPosX
        posY = newPosY
    if nextPos in [8, 7, 6]
        break
segment6 = 0
while posX < 480
    if nextPos in [5, 6, 7, 8, 1]
        segmen1 = segmen1+1
        posX = newPosX
        posY = newPosY
    if nextPos in [2, 3, 4]
        break
segment7 = 0
while posX < 480
    if nextPos in [5, 4, 3, 2, 1]
        segmen1 = segmen1+1
        posX = newPosX
        posY = newPosY
    if nextPos in [8, 7, 6]
        break

segment8 = 0
while posX < 480
    if nextPos in [5, 6, 7, 8, 1]
        segmen1 = segmen1+1
        posX = newPosX
        posY = newPosY
    if nextPos in [2, 3, 4]
        break

```

2.4. Classification

The resulting feature vector is entered into the comparison process to determine the user whose photograph of the palm of the hand has been taken. The method used is template matching [13] using the Euclidean distance. Euclidean distance is one of the most commonly used methods to calculate the similarity of 2 vectors. The Euclidean distance method calculates the square root of the difference in 2 vectors, namely a feature vector of the user that is entered with the characteristics in the existing database [8]. The Euclidean distance between two points is the length of the hypotenuse of a right triangle determined by the following equation (1)

$$d_{ij} = \sqrt{\sum_{k=1}^n (x_{ik} - x_{jk})^2} \quad (1)$$

where d_{ij} is the euclidean distance, x_{ik} is the input feature vector, x_{jk} is the characteristic of the database vector and k is the number of feature vectors in this system is 8. Recognition is obtained by calculating the closest distance, which is the smallest Euclidean distance value.

3. Experimental results

Experiments carried out on 10 users. Of the ten users, one person was taken with 10 poses of palm, given the A1, A2, ... A10 code. Nine people took one photo of the palm with a code B, C, ..., J. With these two types of data will be determined the variation of Euclid distance of a user in various pose, and the variation of Euclid distance between users. The hypothesis we propose is: the variation of Euclid's distance in various pose is small, while the variation between users is large. The experimental results are shown in Tables 1, 2, 3, and 4, where Table 1 shows the measurement results of 8 finger segments of each pose in user A, Table 2 shows the competition results of Euclid distance calculation for each pose, Table 3 shows the results of measurements of each user's finger segment, and Table 4 shows the competition from the calculation of Euclid distance for each user.

Table 1: Results of measurement of 8 segments in user A

| User Code | segment | | | | | | | |
|-----------|---------|-----|-----|-----|-----|-----|-----|-----|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| A1 | 190 | 160 | 189 | 103 | 188 | 160 | 242 | 104 |
| A2 | 193 | 162 | 188 | 108 | 189 | 159 | 241 | 98 |
| A3 | 193 | 160 | 189 | 109 | 191 | 163 | 241 | 105 |
| A4 | 195 | 161 | 187 | 107 | 187 | 162 | 235 | 99 |
| A5 | 195 | 163 | 187 | 108 | 188 | 159 | 244 | 97 |
| A6 | 192 | 161 | 190 | 109 | 189 | 160 | 238 | 102 |
| A7 | 195 | 160 | 192 | 97 | 189 | 156 | 240 | 98 |
| A8 | 191 | 159 | 189 | 100 | 190 | 158 | 237 | 101 |
| A9 | 188 | 158 | 189 | 100 | 191 | 150 | 234 | 99 |
| A10 | 193 | 159 | 191 | 107 | 191 | 148 | 235 | 95 |

Table 2: Competition of calculating result of Euclidean distance for each pose for user A

| User Code | A1 | A2 | A3 | A4 | A5 | A6 | A7 | A8 | A9 | A10 |
|-----------|----|----|----|----|----|----|----|----|----|-----|
| A1 | 0 | - | - | - | - | - | - | - | - | - |
| A2 | 9 | 0 | - | - | - | - | - | - | - | - |
| A3 | 8 | 9 | 0 | - | - | - | - | - | - | - |
| A4 | 11 | 8 | 10 | 0 | - | - | - | - | - | - |
| A5 | 11 | 4 | 11 | 10 | 0 | - | - | - | - | - |
| A6 | 8 | 6 | 6 | 7 | 9 | 0 | - | - | - | - |
| A7 | 11 | 12 | 16 | 14 | 13 | 14 | 0 | - | - | - |
| A8 | 7 | 10 | 12 | 10 | 13 | 10 | 8 | 0 | - | - |
| A9 | 15 | 16 | 19 | 16 | 18 | 15 | 12 | 9 | 0 | - |
| A10 | 18 | 14 | 19 | 16 | 16 | 15 | 14 | 14 | 10 | 0 |

Table 3: Results of measurement of 8 finger segments per user

| User Code | segment | | | | | | | |
|-----------|---------|-----|-----|-----|-----|-----|-----|-----|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| A1 | 190 | 160 | 189 | 103 | 188 | 160 | 242 | 104 |
| B | 199 | 157 | 183 | 96 | 190 | 160 | 235 | 96 |
| C | 215 | 182 | 199 | 135 | 216 | 159 | 252 | 104 |
| D | 212 | 161 | 194 | 110 | 199 | 175 | 260 | 103 |
| E | 207 | 181 | 206 | 135 | 223 | 156 | 253 | 108 |
| F | 204 | 177 | 201 | 118 | 206 | 188 | 254 | 104 |
| G | 192 | 151 | 181 | 105 | 179 | 157 | 225 | 96 |
| H | 203 | 172 | 195 | 120 | 197 | 171 | 260 | 110 |
| I | 194 | 163 | 181 | 115 | 199 | 163 | 225 | 95 |
| J | 200 | 182 | 202 | 126 | 207 | 171 | 257 | 110 |

Table 4: Competition of calculating result of Euclidean distance for each user.

| User Code | A1 | B | C | D | E | F | G | H | I | J |
|-----------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| A1 | 0 | - | - | - | - | - | - | - | - | - |
| B | 17 | 0 | - | - | - | - | - | - | - | - |
| C | 56 | 61 | 0 | - | - | - | - | - | - | - |
| D | 35 | 38 | 41 | 0 | - | - | - | - | - | - |
| E | 58 | 65 | 14 | 47 | 0 | - | - | - | - | - |
| F | 46 | 52 | 37 | 26 | 41 | 0 | - | - | - | - |
| G | 24 | 20 | 70 | 52 | 74 | 63 | 0 | - | - | - |
| H | 35 | 44 | 33 | 19 | 37 | 23 | 54 | 0 | - | - |
| I | 27 | 25 | 51 | 44 | 56 | 48 | 26 | 44 | 0 | - |
| J | 45 | 55 | 25 | 32 | 25 | 21 | 64 | 17 | 48 | 0 |

From Table 1 at a glance it can be seen that there are small variations between poses in each segment. If the Euclidean distance between poses competed (Table 2) shows that the Euclid distance between poses varies between 7 - 18. From Table 3 at a glance it can be seen that there is a large variation between users in each segment. If the Euclid distance between users is competed (Table 4) shows that the Euclid distance between users varies between 17 - 58. It turns out that there is an Euclid distance intersection between the various poses of a user and between users. This means that the hypothesis we propose is not entirely correct. An identifiable user can occur as someone else. For example: if the database is A10 ..., B, C, ... J, and the user identified is A1, it will be identified as B. From this case (10 users with a user with 10 poses) the accuracy can be calculated as 90%.

4. Conclusions

Biometrics based on finger edge contour perimeter have been reported. The algorithm for determining finger edge contour perimeter has been provided and has proven to be able to do its work well. The experimental results have been shown, giving good performance with a success of up to 90%. The system as proposed is known to be a good alternative for identification systems, even though it requires further work that can be implemented easily. Future work must apply additional data bases to more general results.

Acknowledgement

Financial assistance was provided by the Government of the Republic Indonesia through the Faculty of Science and Mathematics of the Diponegoro University.

References

- [1] Jain, A.K., Ross, A. and Prabhakar, S. 2004. *IEEE Transactions on Circuits and Systems for Video Technology*. **14** 1
- [2] Spinella, E. 2003. *Information security reading room*, SANS Institute, U.S.
- [3] Thai, L.H. and Tam, H.N. 2010. *International Journal of Computer Science Issues*. **7** 3
- [4] Viola, P. and Jones, M.J. 2004. *International Journal of Computer Vision*. **57** (2) 137–154
- [5] Farzin, H., Abrishami-Moghaddam, H. and Mohammad-Shahram, M. 2008. *EURASIP Journal on Advances in Signal Processing*. **2008**
- [6] Sanchez-Reillo, R., Carmen Sanchez, A. and Gonzalez-Marcos, A. 2000. *IEEE Transactions on Pattern Analysis and Machine Intelligence*. **22** (10) 1168-1171
- [7] Faúndez-Zanuy, M., Elizondo, D.A., Ferrer-Ballester, M.A., and Travieso-González, C.M. 2007. *Authentication of individuals using hand geometry biometrics: a neural network approach*, *Neural Processing Letters*. **26** (3) 201-216.
- [8] Varchol, P., And Levický, D. 2007. *Radioengineering*. **16** 4
- [9] Mathivanan, B., Palanisamy, V. and Selvarajan, S. 2012. *International Journal of Emerging Technology and Advanced Engineering*. **2** 7.
- [10] Ayeni, J.K., Sadiq, K.A. and Adeyinka, A. 2013. *International Journal of Scientific Research Engineering and Technology*. **2** (6) 352-357
- [11] Rathi, P. and Dubey, S., 2013. *International Journal of Advanced Research in Computer Engineering and Technology*. **2** 6
- [12] Park, G. and Kim, S., 2013. *Sensors*. **13** 2895-2910
- [13] Gonzalez, R.C., Woods, R.E and Eddins, S.L. 2009. *Digital Image Processing Using MATLAB*, Gatesmark Publishing, U.S.A.
- [14] Mahalakshmi, T., Muthaiah, R. and Swaminathan, P. 2012. *Research Journal of Applied Sciences, Engineering and Technology*. **4** (24) 5469-5473

Finger Edge Contour Perimeter as a Biometric Based Identification System

ORIGINALITY REPORT

5%

SIMILARITY INDEX

2%

INTERNET SOURCES

3%

PUBLICATIONS

2%

STUDENT PAPERS

PRIMARY SOURCES

- 1 "Advances in Nonlinear Speech Processing", Springer Science and Business Media LLC, 2013
Publication 1%
- 2 Md. Monwar, Padma Paul, Md. Islam, Siamak Rezaei. "A Real-Time Face Recognition Approach from Video Sequence using Skin Color Model and Eigenface Method", 2006 Canadian Conference on Electrical and Computer Engineering, 2006
Publication 1%
- 3 Submitted to Maria Montessori Institute
Student Paper <1%
- 4 arxiv.org
Internet Source <1%
- 5 www.ajol.info
Internet Source <1%
- 6 Submitted to The Hong Kong Polytechnic University <1%

- 7** Tetsunari Inamura, Satoshi Unenaka, Satoshi Shibuya, Yukari Ohki, Yutaka Oouchida, Shin-ichi Izumi. "Development of VR platform for cloud-based neurorehabilitation and its application to research on sense of agency and ownership", Advanced Robotics, 2016
Publication <1%
-
- 8** dspace.vsb.cz
Internet Source <1%
-
- 9** pt.scribd.com
Internet Source <1%
-
- 10** www.fhi.sk
Internet Source <1%
-
- 11** Submitted to Lincoln High School
Student Paper <1%
-
- 12** Submitted to Kaplan International Colleges
Student Paper <1%
-
- 13** Liming He, Geng-Sheng Kuo. "A Novel Time Synchronization Scheme in Wireless Sensor Networks", 2006 IEEE 63rd Vehicular Technology Conference, 2006
Publication <1%
-
-

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off

Finger Edge Contour Perimeter as a Biometric Based Identification System

GRADEMARK REPORT

FINAL GRADE

/0

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7

PAGE 8

PAGE 9
